


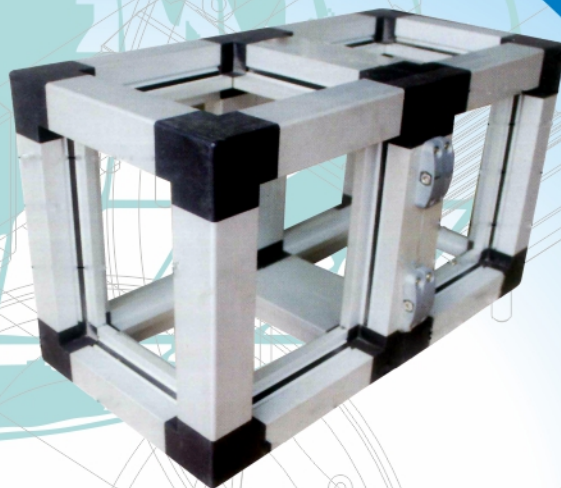

TECHNOCAB

HVAC SOLUTIONS PVT. LTD.

**ONE STOP SOLUTION PROVIDER FOR
THERMAL BREAK PROFILES & AHU ACCESSORIES.**

About Technocab HVAC Solutions




Established in the year 2006, We, “Technocab HVAC Solutions Pvt. Ltd.”, are a prominent manufacturers & exporter of **Thermal Break Profiles designed as per EN1886 Standard** & AHU Accessories. Our line of products is highly appreciated by our clients for their impeccable designs, durability, high tensile strength and anti-corrosive nature.

The thermal brake profiles used an "polyamide strip" to break cold and heat transfer between interior and exterior. The thermal brake profile is suitable for panels of 25 mm and 40 mm thickness. Thermal brake assembly. The thermal break is a continuous barrier between the inside and outside of the AHU frame that prevents conductive thermal energy loss. The thermal barrier securely ties the inner and outer frames of the AIR HANDLING UNIT. This thermal brake creates thermal energy loss resistance. The insulating material in a thermal brake uses polyamide (a combination of nylon and glass fiber) whose temperature capacity can withstand high temperatures.

Moreover, we procure some of the most innovative & advanced range of products from the well trusted vendors of the industries and constantly aim at providing everything under one brand. This has not only made us renowned worldwide, but today we are also acknowledged as the one stop solution provider for industrial Air Conditioning & AHU Accessories.

Our organization is supported by a team of experienced professionals, who are well versed in their respective domains. Owing to our state-of-the-art infrastructure that consists of a capacious warehouse, we are able to meet bulk requirements of clients on time. The unconditional efforts of our professionals make it possible for us to maintain quality standards in entire process.




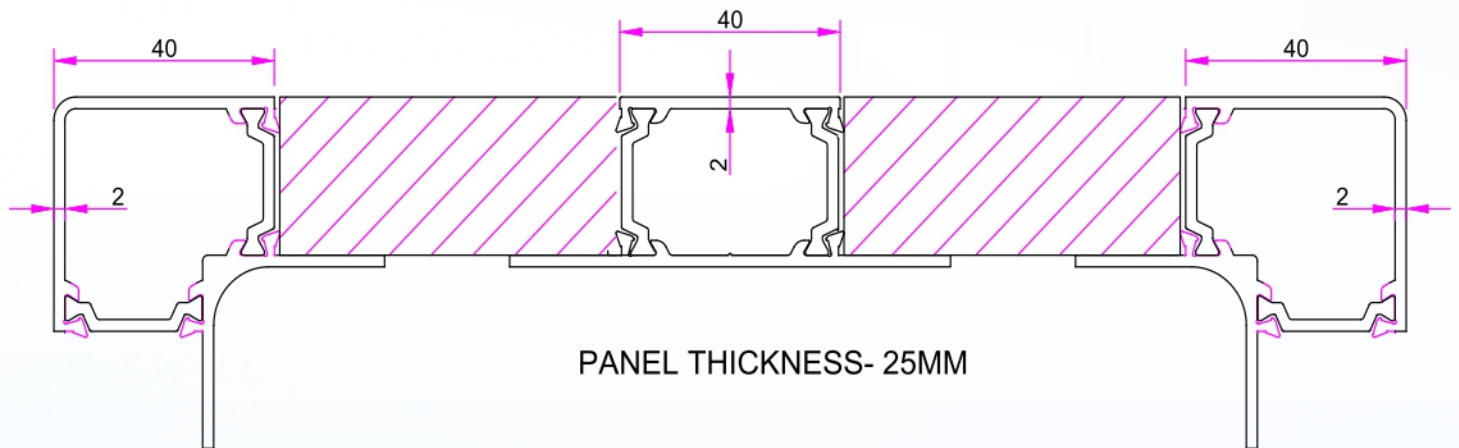


ATBSCP 4025




ATBSOP 4025

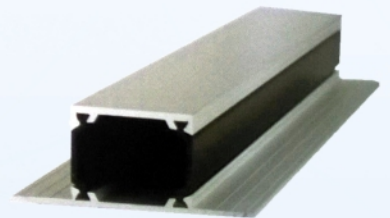


NTBSCJ4025




NTBSOJ4025




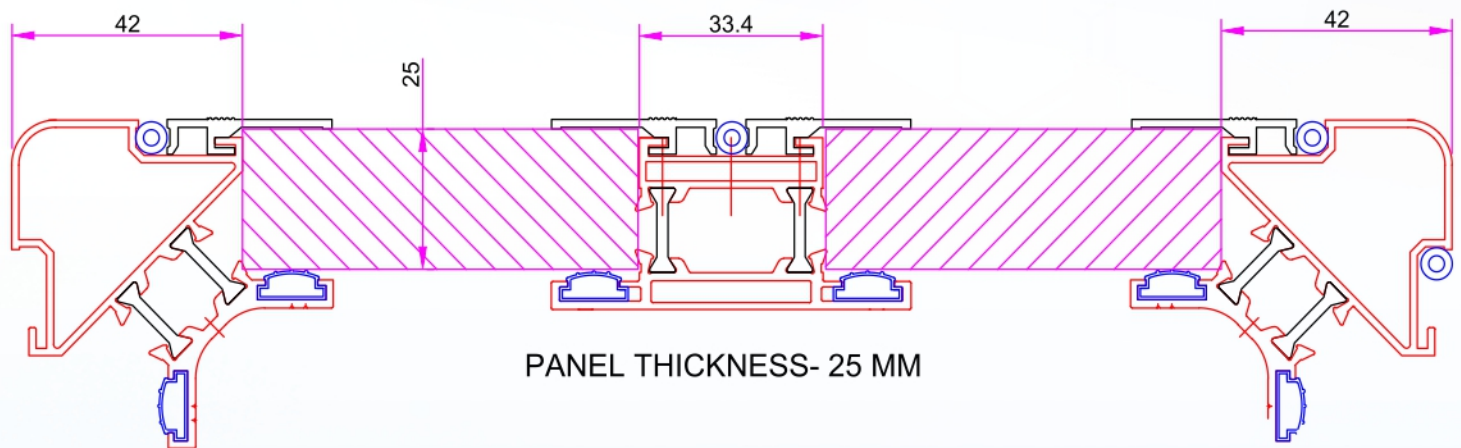


SLTCP4025




SLTOP4025

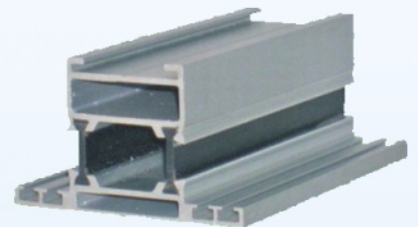


SLTCJ4025

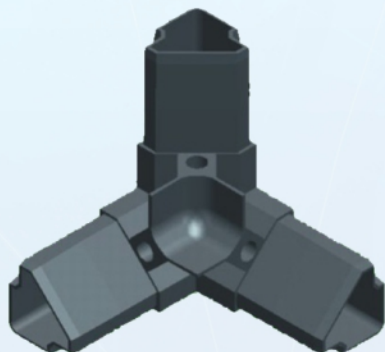


SLTOJ4025

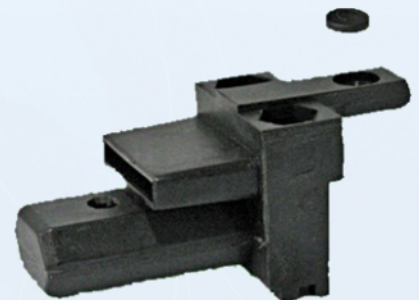


Thermal Break Profiles for 25/43mm Panel

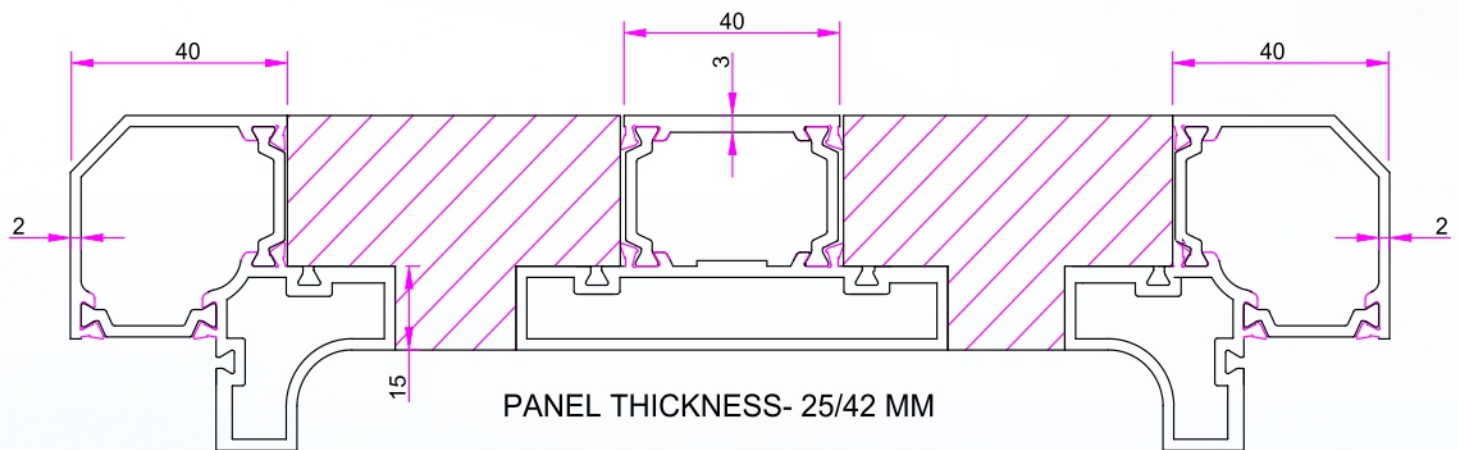


ATBCP 4025



ATBOP 4025

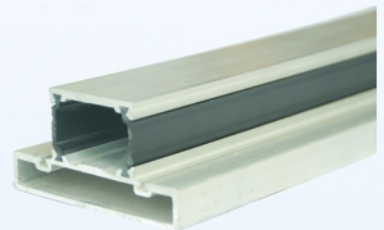


NTBCJ4025




NTBOJ4025




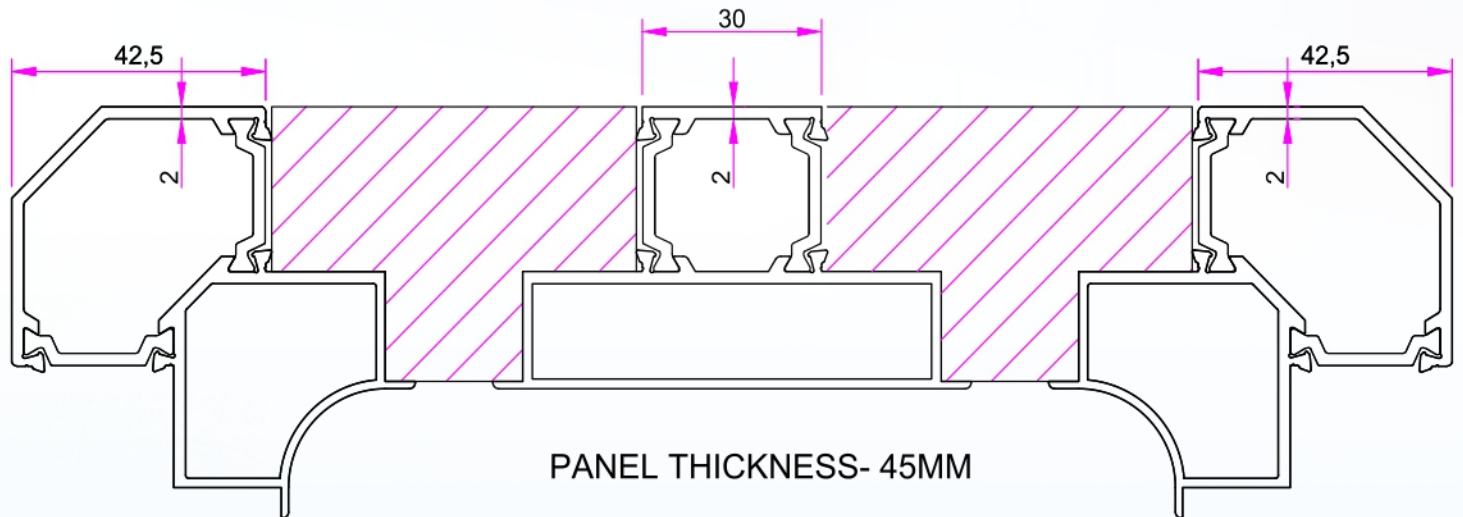

ATBCP 4045



ATBOP 4045

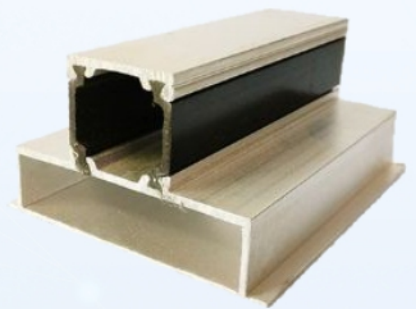


NTBCJ4045



NTBOJ4045




Thermal Break Profiles for 45 mm Panel

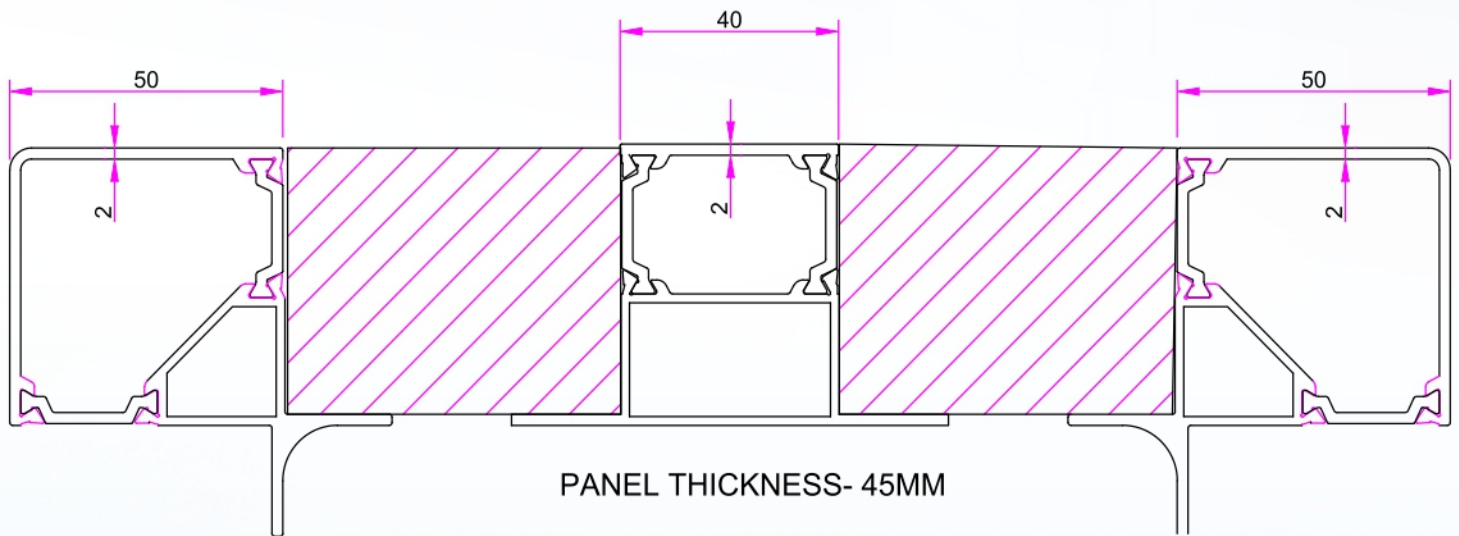


ATBSCP 5045



ATBSOP 5045

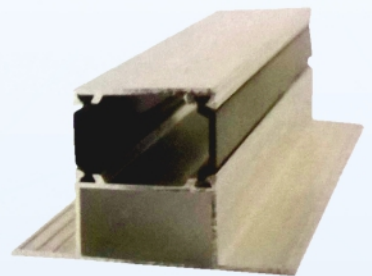


NTBSCJ5045




NTBSOJ5045




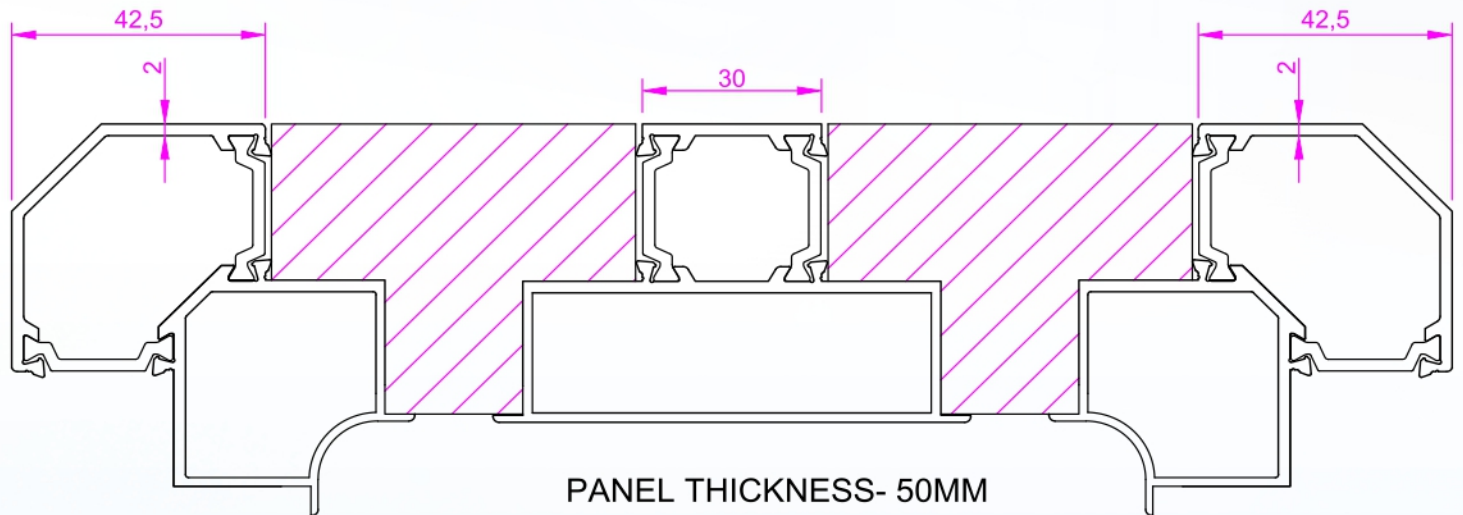

ATBCP 4050



ATBOP 4050

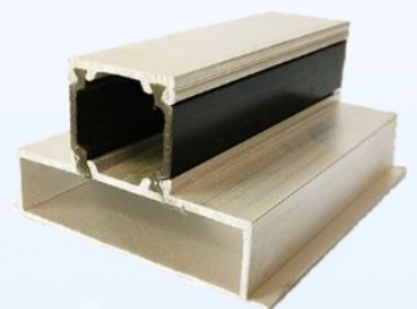


NTBCJ4050




NTBOJ4050




Thermal Break Profiles for 45/62 mm Panel

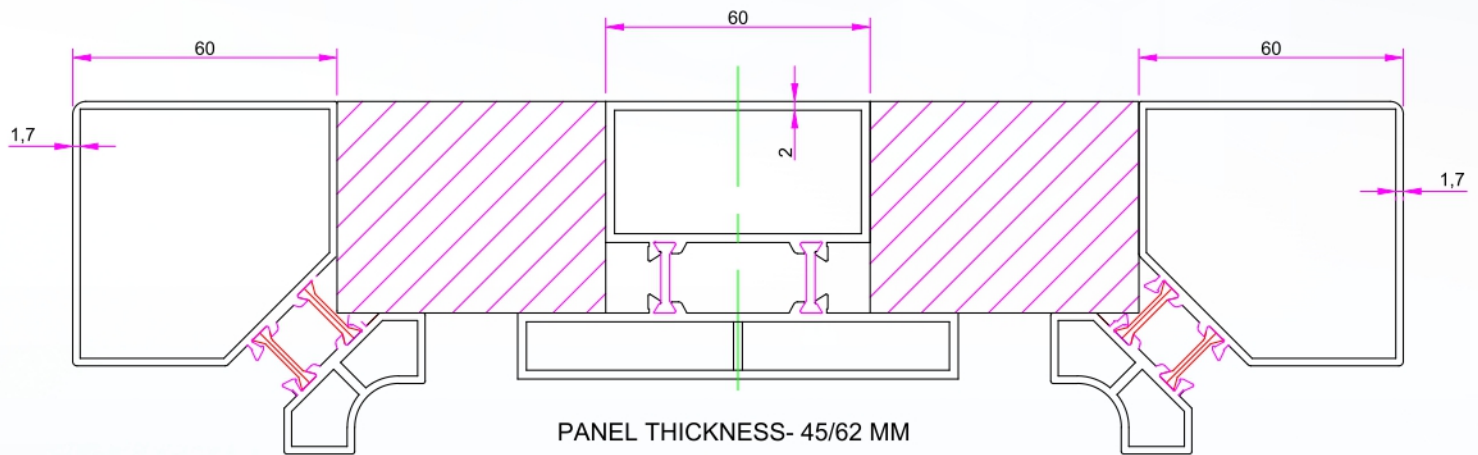


ATBCP 6045




ATBOP 6045




NTBCJ 6045




NTBOJ 6045




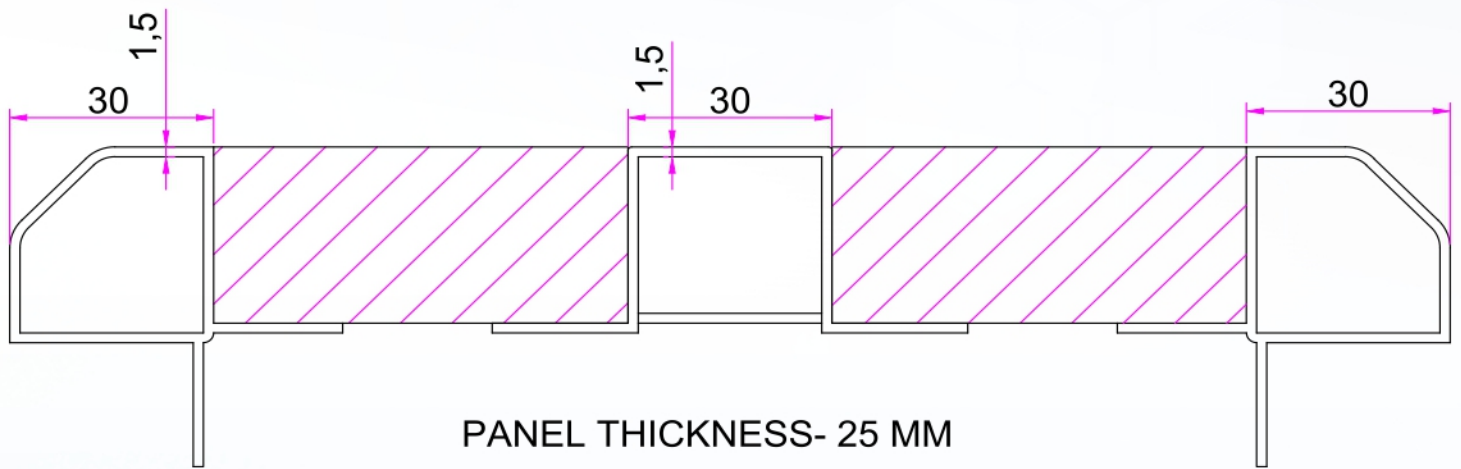

SMC3025A6




SI30256




CTP3025




JNT3025




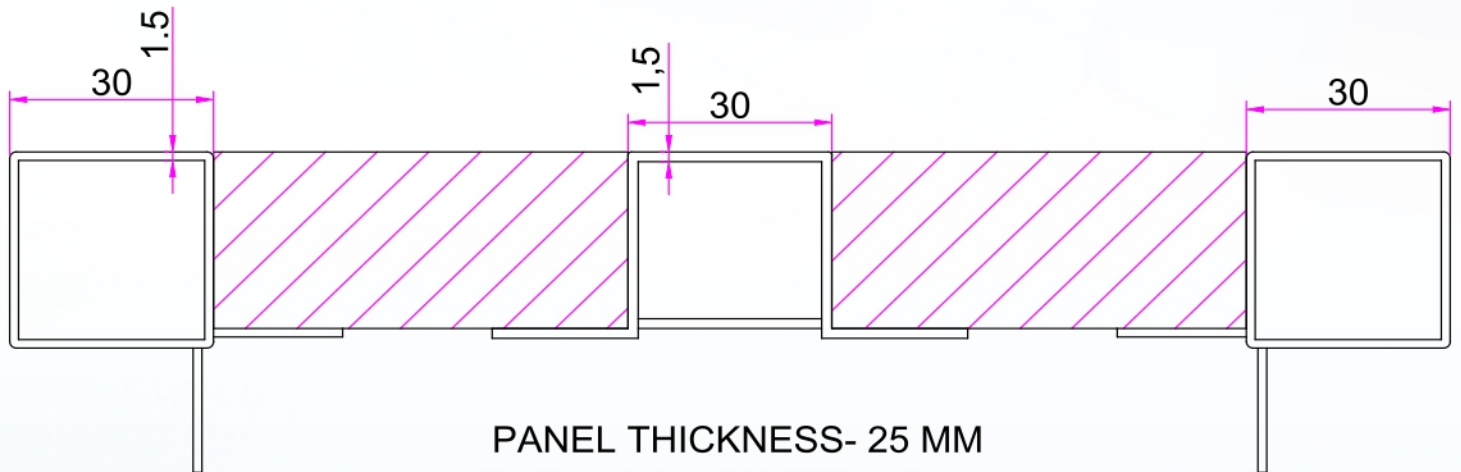


SMS3025




SI30256




CSQ3025




JNT3025




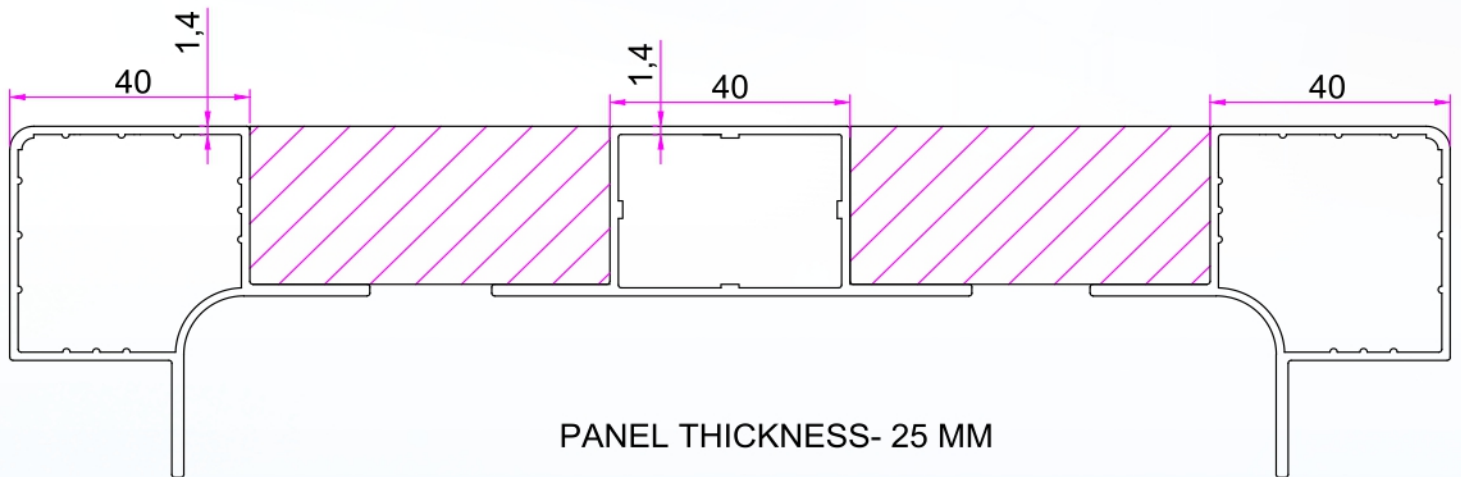


SMS-C4025




SI-A4025

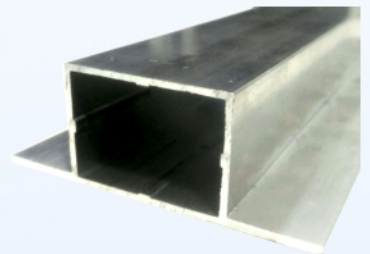


NTBSCJ4025




NTBSOJ4025




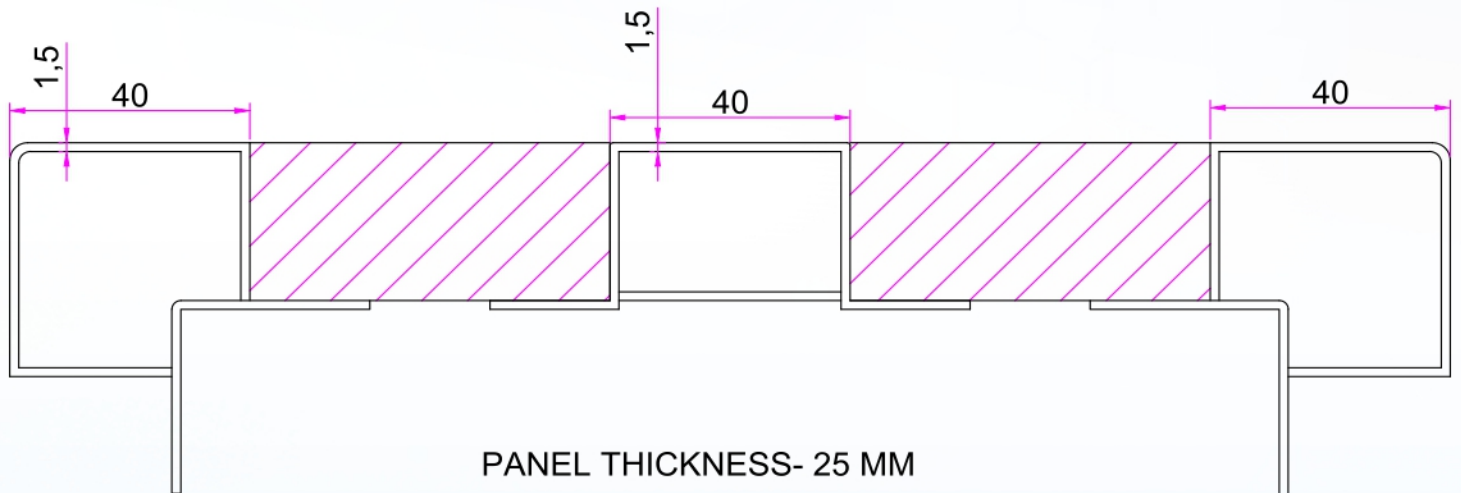

SMS4025



SI4025

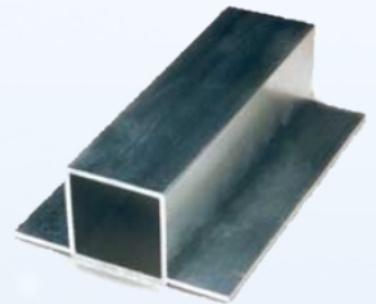


CSQ4025




JNT4025




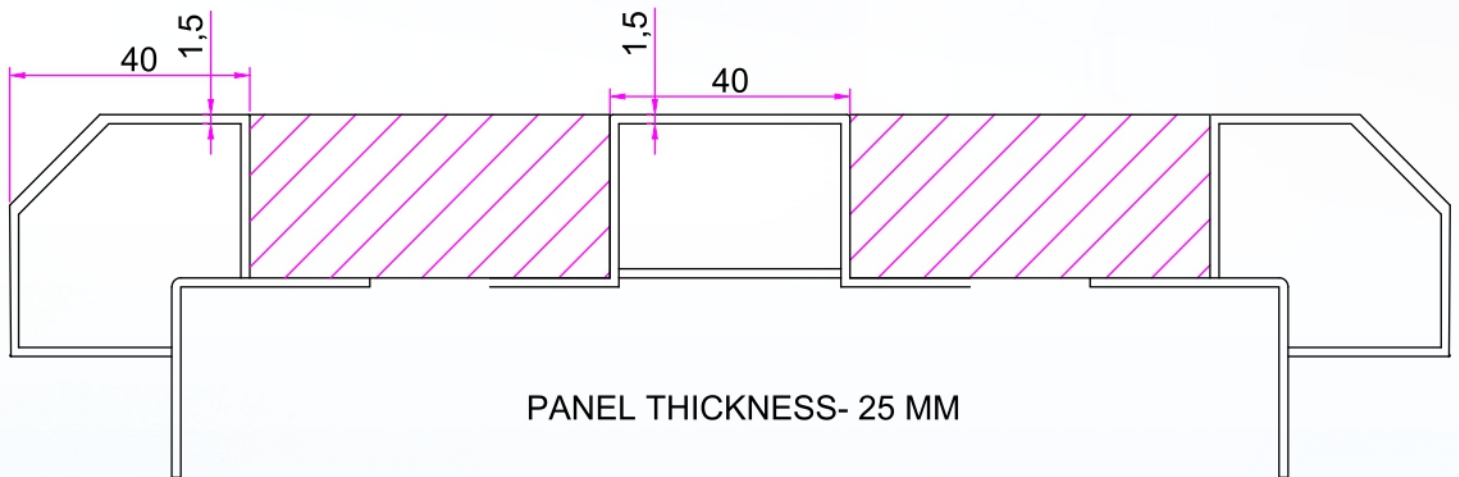


SMC4025A6




SI4025

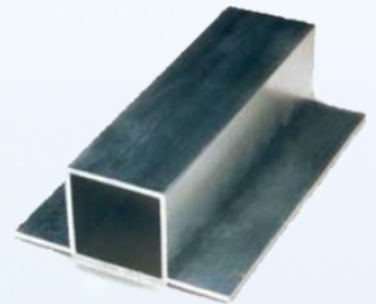


CTP4025




JNT4025




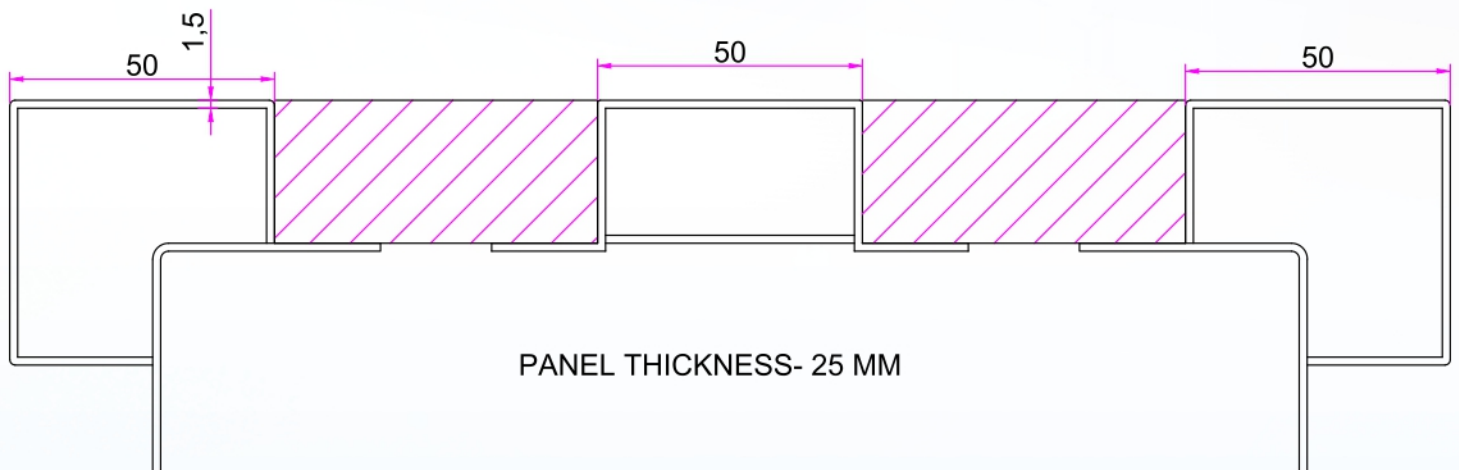


SMS5025




SI5025

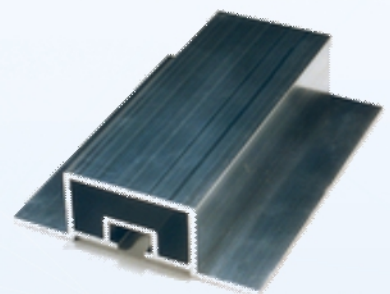


CSQ5025




JNT5025




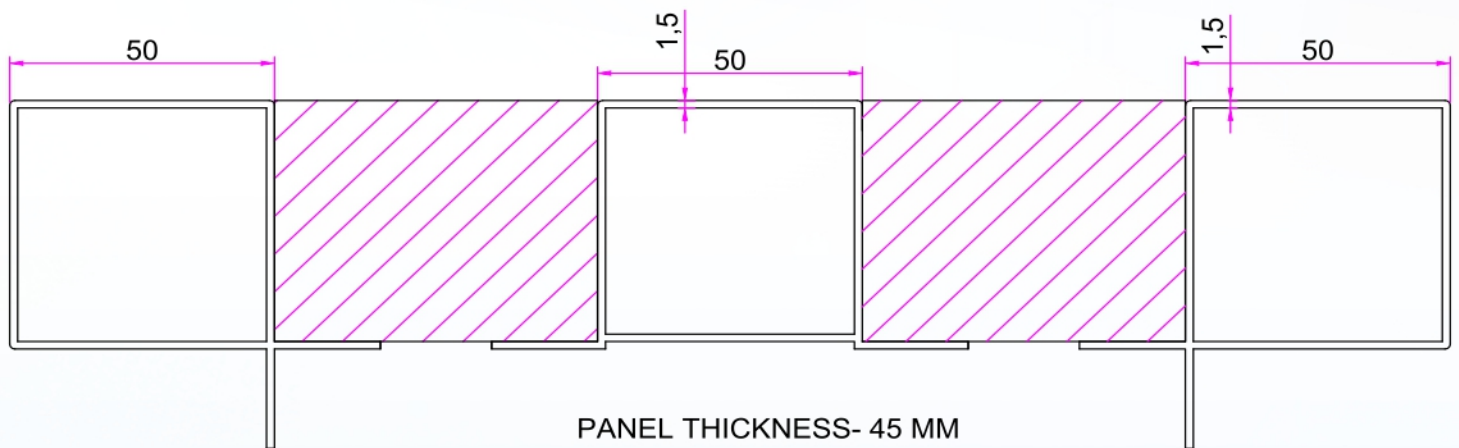


SMS5045




SI5045




CSQ5045




JNT5045



ABAS40



ABAS60

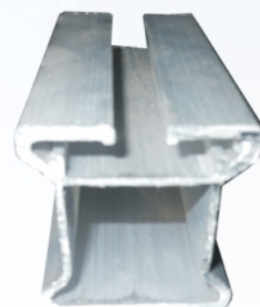

BASE PLATE




Frame Size	Suitable HP
SDL100	1 to 3
SDL112	1 to 5
SDF132	7.5 to 10
SDL180	12.5 to 25
SDL200	30 to 60

Spring Mount



Load Capacity : 100 -200 kg

Rubber Pad

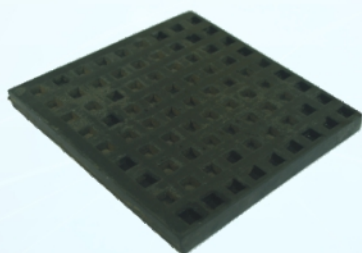


Size Available
5.5 x 5.5 x 1/2"
6 x 6 x 1/2"

TS 1




Height 30 mm
Load Capacity : 60 kg

TS2R



Height 30 mm
Load Capacity : 60 kg

TS2



Height 40 mm
Load Capacity : 150 kg

TS3



Height 75 mm
Load Capacity : 250 kg

T-Bolt



PNLK6



PNLK8



BKN625



BKN825



HNY60



HAL60/100



HND100S



HND25R-HND45R



HND25CS - HND45CS




HND25C-HND45C




DPP



WND25

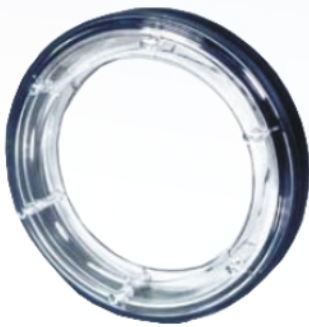

WND45



CBS100



Nylon Unit Connector



SLV 1" to 3"




Ceantry / Cable Entry



NTL -M



Screw Cap

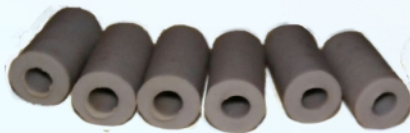


Gasket



BSH25/45



Mist Eliminator

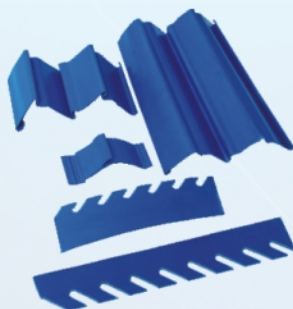


Polyamide Strip




NST4/5/6/8/10




DPR - S

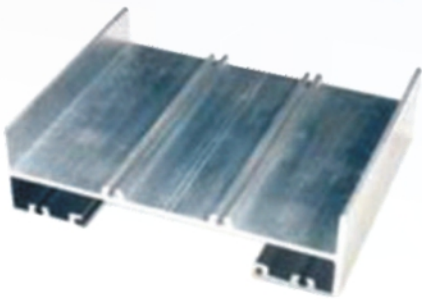


DPR - B

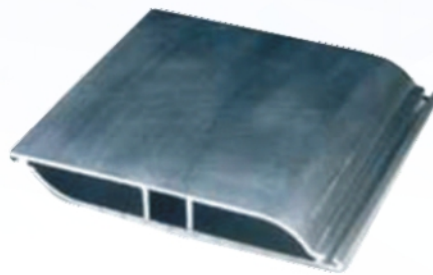


DPR - T

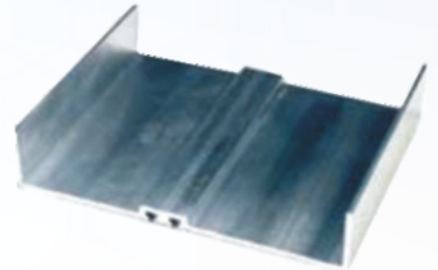

Aerofoil Damper

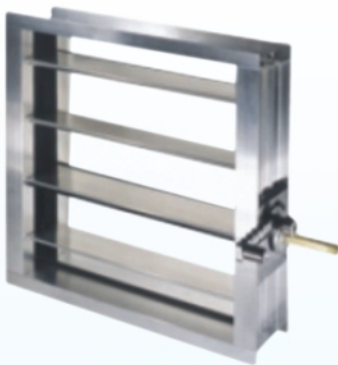


DPRN - H

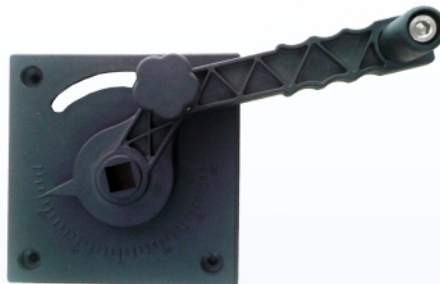

DPR - H



UL Certified Fusible Link

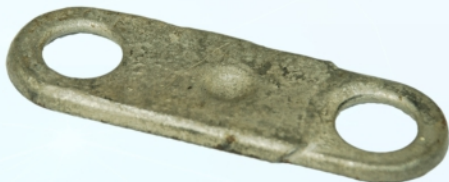


DPR-G




Flexible Connector




FLEXIBLE DUCT CONNECTOR

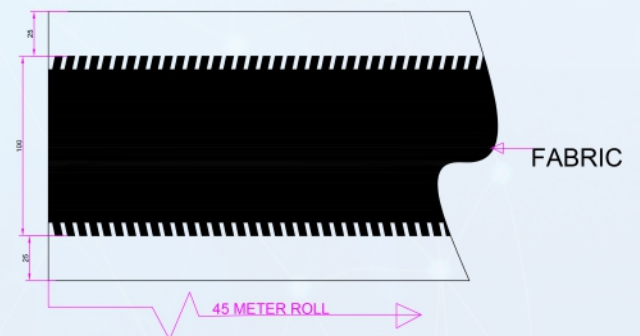


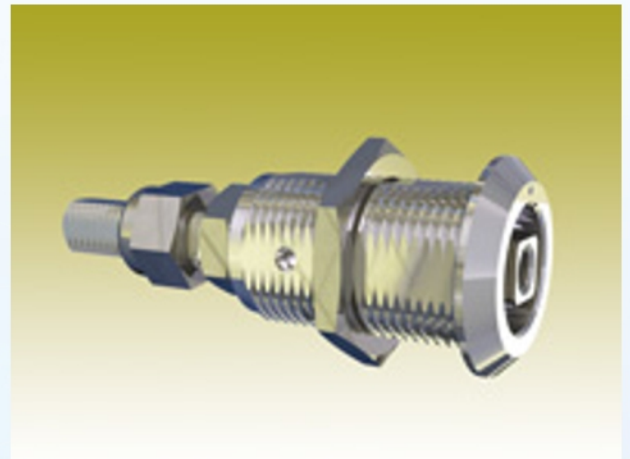


Aluminium Internal Coving




Panel Profile

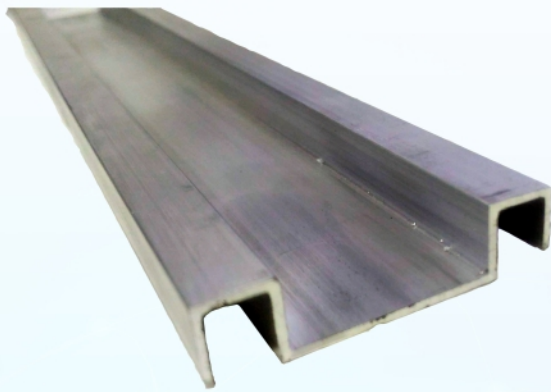


Aluminium 3D Corner

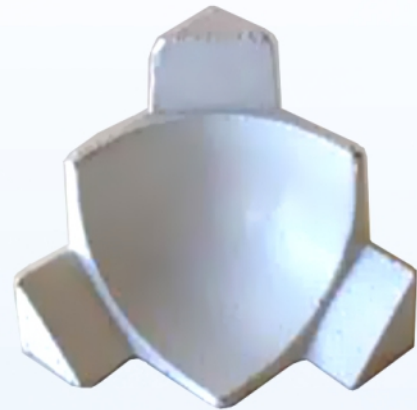

Nylon Cap

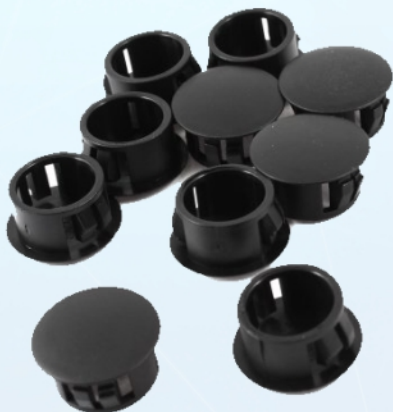

Nylon Panel Corner

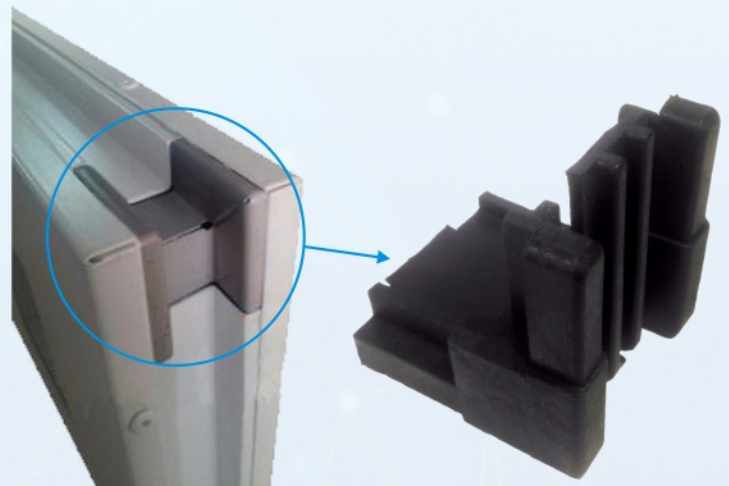

Size Available 50mm, 75mm & 100mm

We are converted business organisations engaged in manufacturing, supplying and exporting a wide range of **Thermal Break Profiles designed as per EN1886 Standard & AHU Accessories**, Available in Varied Sizes, Dimensions and textures, these products are highly applauded, durability, dimensional accuracy and wear & tear resistance. Our procurement agents make it sure that these products are procured from trusted & quality approved manufacturers. With the help of our vendors, we can design these products as per the specific requirements of our valued client.




Why us ?

We are recognized as a prominent retailer of Air Conditioning & AHU Accessories, which are of superior quality as compared to similar products available in the market. Some distinguishing features, which set us apart from other retailers are:

- Fair and ethical business activities
- Well equipped infrastructure
- Financial stability
- Quality range of products
- Customization facilit

MFG. THERMAL BREAK PROFILES & AHU ACCESSORIES.

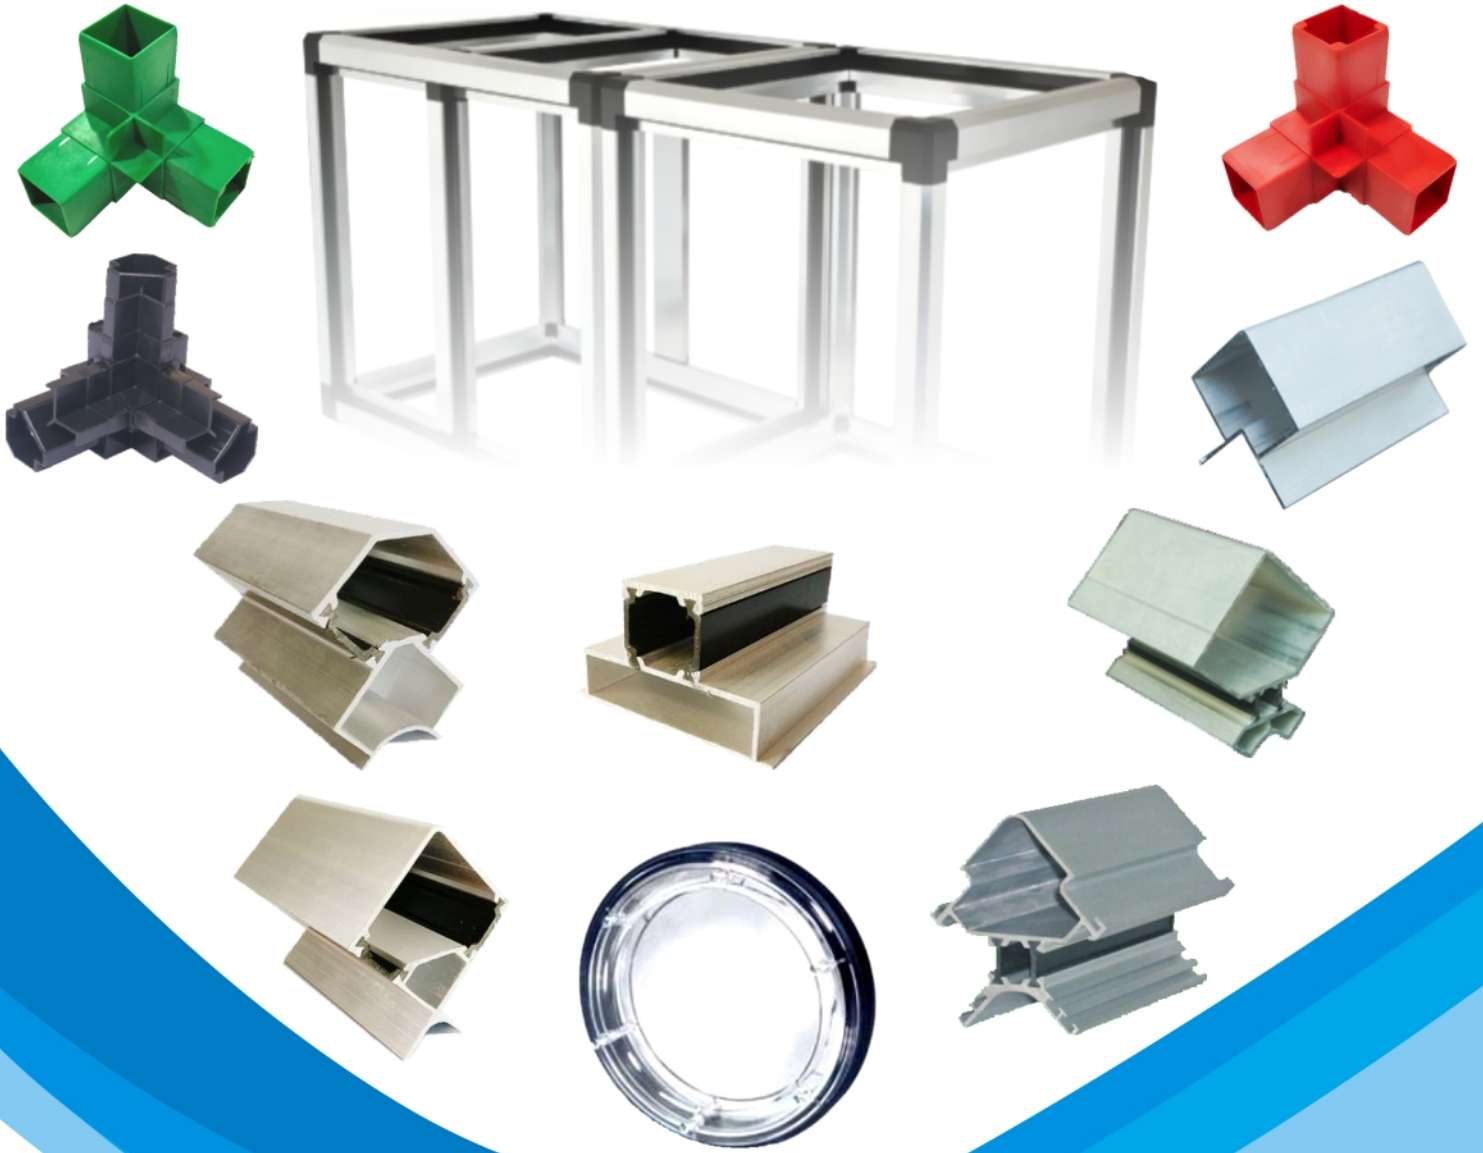

TECHNOCAB HVAC SOLUTIONS PVT. LTD.

HEAD OFFICE :

Silver Streak, Plot Number 64A, Sector - 19, Koparkhairane,
Navi Mumbai - 400 709. Maharashtra, INDIA.

FACTORY :

Bhoir Industrial Estate, Gala No. 1 & 2, Tukaram Chowk, Dawadi,
Kalyan Shil Road, Dombivli(E), Thane - 421203. Maharashtra, India.

DELHI BRANCH:

Khasra No. 59/8 & 9/1, Village Near Bulbul Vatika,
Landmark – Metro Pillar, No. 593,
Mundka, New Delhi – 110041
Email: sales2@tse.net.in, **Mob.:** +91 98679 16401.

Ph.: +91-22-2754 4895 / 2755 0069

Cell: +91 9819442292 / 9819442291 / 9819442315

Email: sales@tse.net.in / sales1@tse.net.in
techs.solution@gmail.com

DUBAI BRANCH (REP):

S.M.GULF, PO BOX - 21099, DUBAI. (UAE)

Email: sales3@tse.net.in,

Mob.: +971-52-9862375

www.tse.net.in